


HD-X 1218 LINE FRONT VIEW

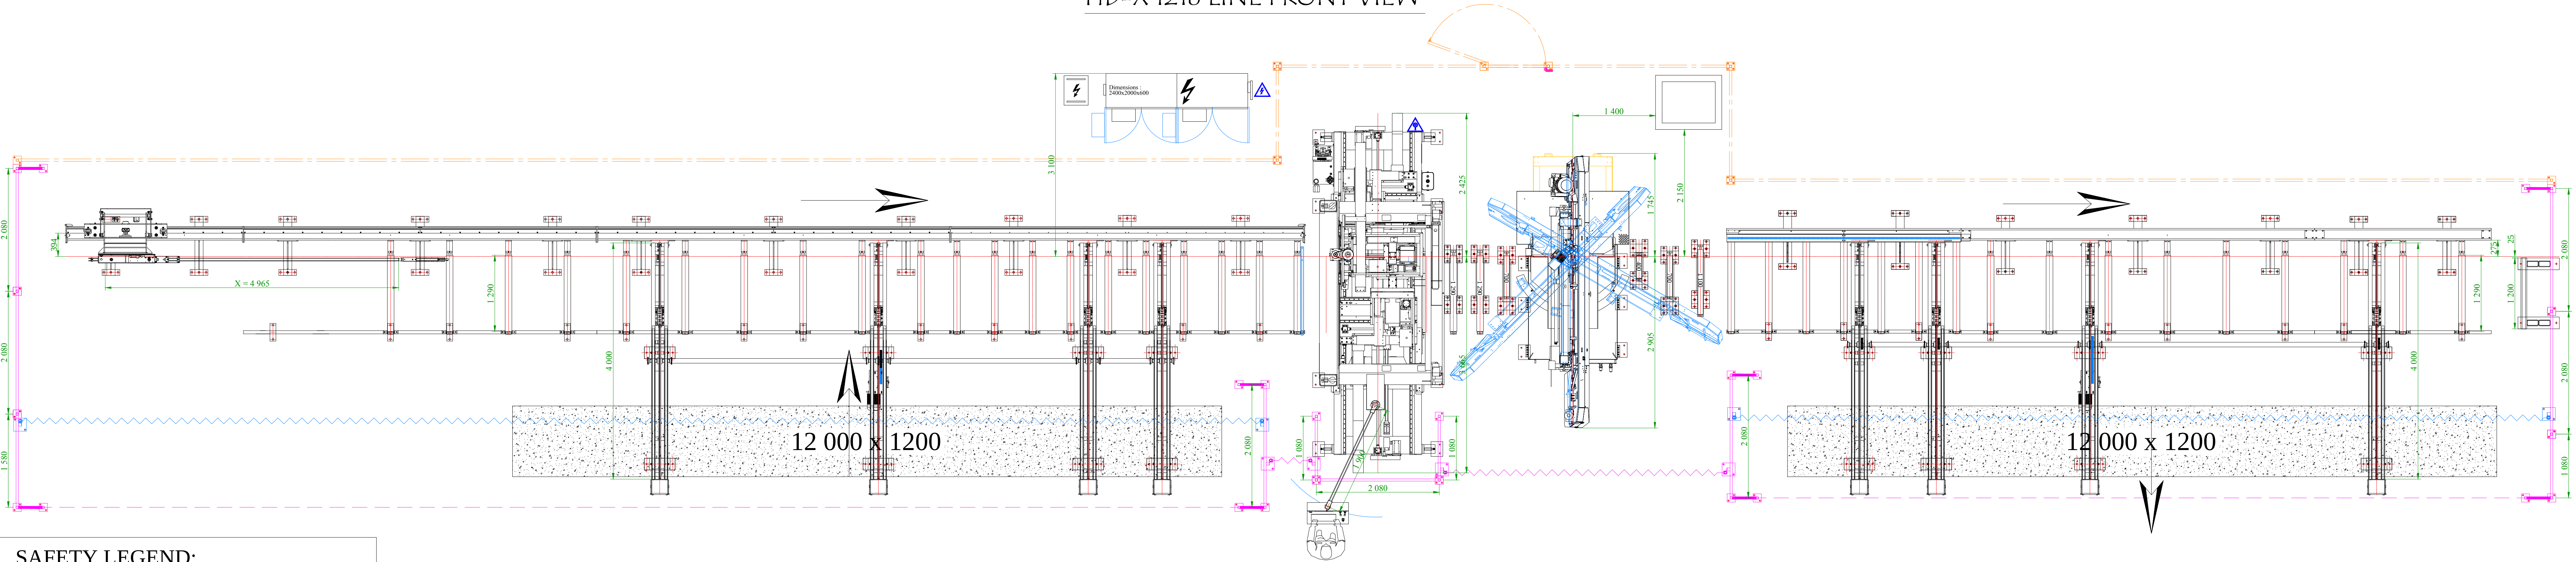

SAFETY LEGEND:	
VERNET BEHRINGER SUPPLY:	CUSTOMER SUPPLY
SAFETY FENCE Height 1800 mm (Mesh size 40 x 40 mm).	SAFETY FENCE Height 1800 mm (Mesh size 40 x 40 mm).
Safety fence KICKSTAND	DOOR 1080 mm Height 1800 mm (Mesh size 40 x 40 mm).
DOOR SAFETY CONTACT	Marking on the ground accompanying light fences
LIGHT FENCE Height 400-900 mm.	Marking on the ground accompanying light fences
LIGHT FENCE Height 100-600 mm.	Marking on the ground or other safety device
Total length of safety fences supplied by Vernet Behringer: 19.380 M	

REMARKS OR ANNOTATIONS :

GROUND FASTENING
INPUT BENCH LATERAL SYSTEMS, MACHINE BLOCK, OUTPUT BENCH, AS WELL AS SAFETY DEVICES WILL BE FASTENED TO THE GROUND THANKS TO MECHANICAL BOWEL PINS "HILTI".
REF: HSA M16/20 x 125 TOTAL QUANTITY : 320.
REF: HSA M16/20 x 145 TOTAL QUANTITY : 10.
- TO BE SUPPLIED BY CUSTOMER -

GROUND QUALITY
GROUND FLATNESS TOLERANCE ± 15 MM. IN CASE OF UPPER DIFFERENCE, CONTACT US
CONCRETE MINI THICKNESS : 250 MM.
CONCRETE QUALITY : C20-25 acc. EN 206-1

SUPPLY
 PNEUMATIC INLET 1m³/Hour pressure 6 bars or 6m³h slack air at normal atmospheric pressure, length out of the ground : 2m.
 ELECTRIC INLET 400V 3 phases + earth 70 kVA, wire out of the ground : 2m. Customer is liable for line protection.
 Overload / Overcurrent / Differential

HD-X^{EVO} 1218
HBP 510/1208 G

DESIGN INITIATIVE CAN BE MODIFIED WITHOUT NOTICE

Scale: 1/50

CUSTOMER N° :
CARRIAGE ON THE BROW
WORKING LEVEL : 830 mm
USABLE LENGTH : 15 M
OUTPUT BENCH : 15 M

VERNET BEHRINGER

ZAE "Capood" - BP37 423
13 rue de la Bess - F 21074 DUON
Tél : +33 (0) 380 732 163
Fax : +33 (0) 380 721 534
www.vernet-behringer.com

LAYOUT
DRAWN BY : P. F.
DATE :
VERSION :
13-01-15 A